

SP后备式系列


650-3000VA



- Small and delicate / 简洁、小巧、大方的外观
- Wideinput voltage range / 超宽市电输入范围
- Excellent microprocessor ensures operation / 卓越的微处理器确保可靠运行
- Automatic voltage regulation / 自动调节市电升压，降压
- Automatic restart function forutility power / 市电自动重启功能
- Simulated sine wave / 输出模拟正弦波



可选输出座

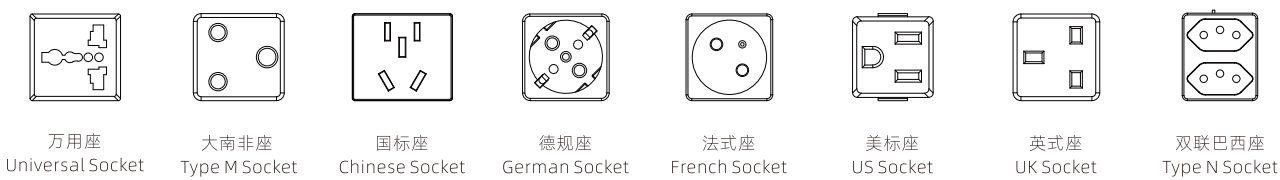

650-3000VA Offline backup UPS

APPLICATIONS/应用范围

- Personal computer / 个人电脑
 - POS(Point of sales) terminals / 税务、通信
 - Fax machine / 传真机
- Printer / 打印机
 - Security system / 安保系统
 - Modem, router / 交换机,路由器



SPECIFICATION/技术规格						
MODEL/型号		SP650	SP1000	SP1500	SP2000	SP3000
Capacity/容量		650VA /390W	1000VA/600W	1500VA/900W	2KVA/1200W	3KVA/1800W
Input voltage range /输入电压范围		140-280V				
Input frequency /输入频率		50±HZ				
Battery voltage /电池电压		DC12V/24V				
Output voltage range/输出电压范围		±10%				
Output frequency/输出频率		50±HZ				
Transfer time /转换时间		≤6ms				
Standard UPS /标机						
Standard UPS battery /标机电池	Battery voltage / 电池电压	12V	12V	24V	24V	24V
	Battery model / 电池电压		12V/9AH	12V/9AH	12V/9AH	12V/12AH
	Battery number / 电池数量	1	1	2	2	2
	Charging time / 充电时间	10-16小时至90% 10-16 Hours to 90% full capacity				
Machine data /机器尺寸	Size(MM)/ 尺寸	320*90*140		350*115*275		
	Weight(KG)/ 重量	5.1KG	5.7KG	12.20KG	12.35KG	15.80KG
Display description /显示说明						
Display status/显示状态		LCD				
Protection function/保护功能		Automatic detection and discharae protection , input short circuit protection, overload protection / 自动检测及放电保护，输入短路保护，过载保护				
Waming sound /警告声音						
Battey mode/ 电池模式		Beep every 4 seconds / 每4秒响一声				
Low battery/ 电池电量低		Beep every second / 每秒响一声				
Overload/过载		Beep eevery seconc / 每秒响一声				
Error/错误		Continuous Beep /连续鸣响				
Usage environment /使用环境						
Humidis/湿度		0-90% Humidity and 0-40 °C Temperature / 0-90%湿度且0-40°C温度				
Noise / 噪音		<40db				
1.Product specifications are subject to change withoutfurther notice 2.If the equipment is installed at an altitude exceeding 1000 meters, its output power will be derated by 1% for every 100 meters of elevatio						